




5660-QU

The Quadco 5660 Harvesting Head is a whole lot of power packed into a durable, high efficiency machine. With a standard 0.404" top saw and a 12-tooth swing out saw disc for a high-speed, 24" quality cut, this harvesting head is built to maximize productivity. Its controlled fixed mount adapter allows the head to float during processing mode, while the high-performance disc saw combines speed and reliability to lower your operating costs. Plus, this model has seen over 25 improvement updates in recent years, ensuring that you're getting the latest technology to maximize your uptime.



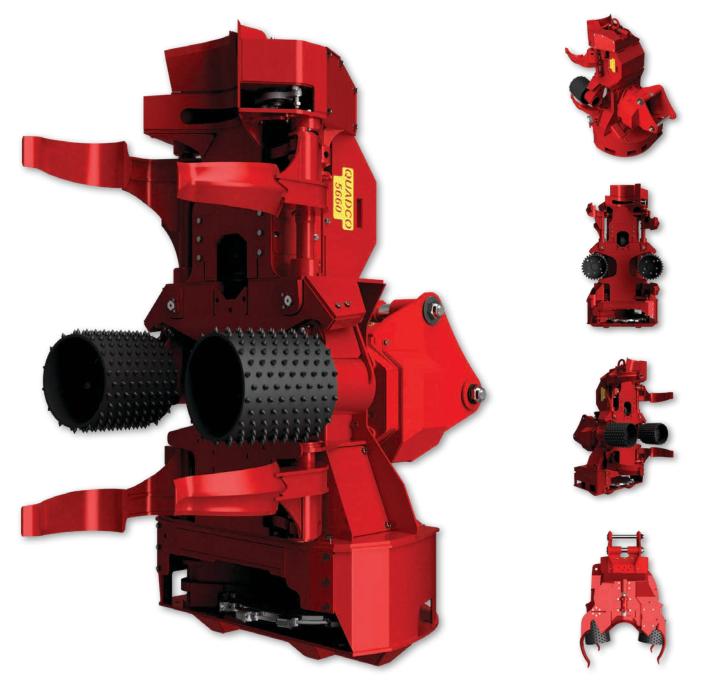

5660-QU

STANDARD CONFIGURATION

METRIC

IMF	PER	IAL

WEIGHTS & DIMS.	Weight	7,300 lbs	3,152 kg
SAW	Top Saw	12"	305 mm
DISC	Cutting Capacity Delimb Capacity (<i>Diameter</i>) Tip-to-Tip Diameter Rated Saw Speed Number of Teeth Saw Kerf		610 mm 51 mm – 559 mm 894 mm rpm 2 41 mm
	Weight (Holders & Teeth) Style (One Piece or Segmented)	300 lbs Segm	136 kg ented

CARRIER REQS.	Carrier Size		22 ton class plus
	PSI Working Pressure	276 bar	4,000 psi
	Valve Section Saw Circuit	322 ipm	85 gpm

169 Industrial Dr. Lexington SC 29072 2550 N Hendrickson Dr. Suite A, Kalama WA 98625 QUADCO.COM | 1-800-668-3340

66 Industriel Blvd. Suite 113, St. Eustache QC J7R 5C2 600 Chilcotin Rd. Kamloops BC V2H 1G5 3 View Road Mangakakahi Rotorua 3015, NZ