


## 18C

C Models enable better leverage when handling tall timber with extended tower and permit faster accumulation with linked arm geometry. They feature stronger, more durable cast arms contoured for maximum support when accumulating as well as an ultra-reliable disc drive with easily adjustable bearings.

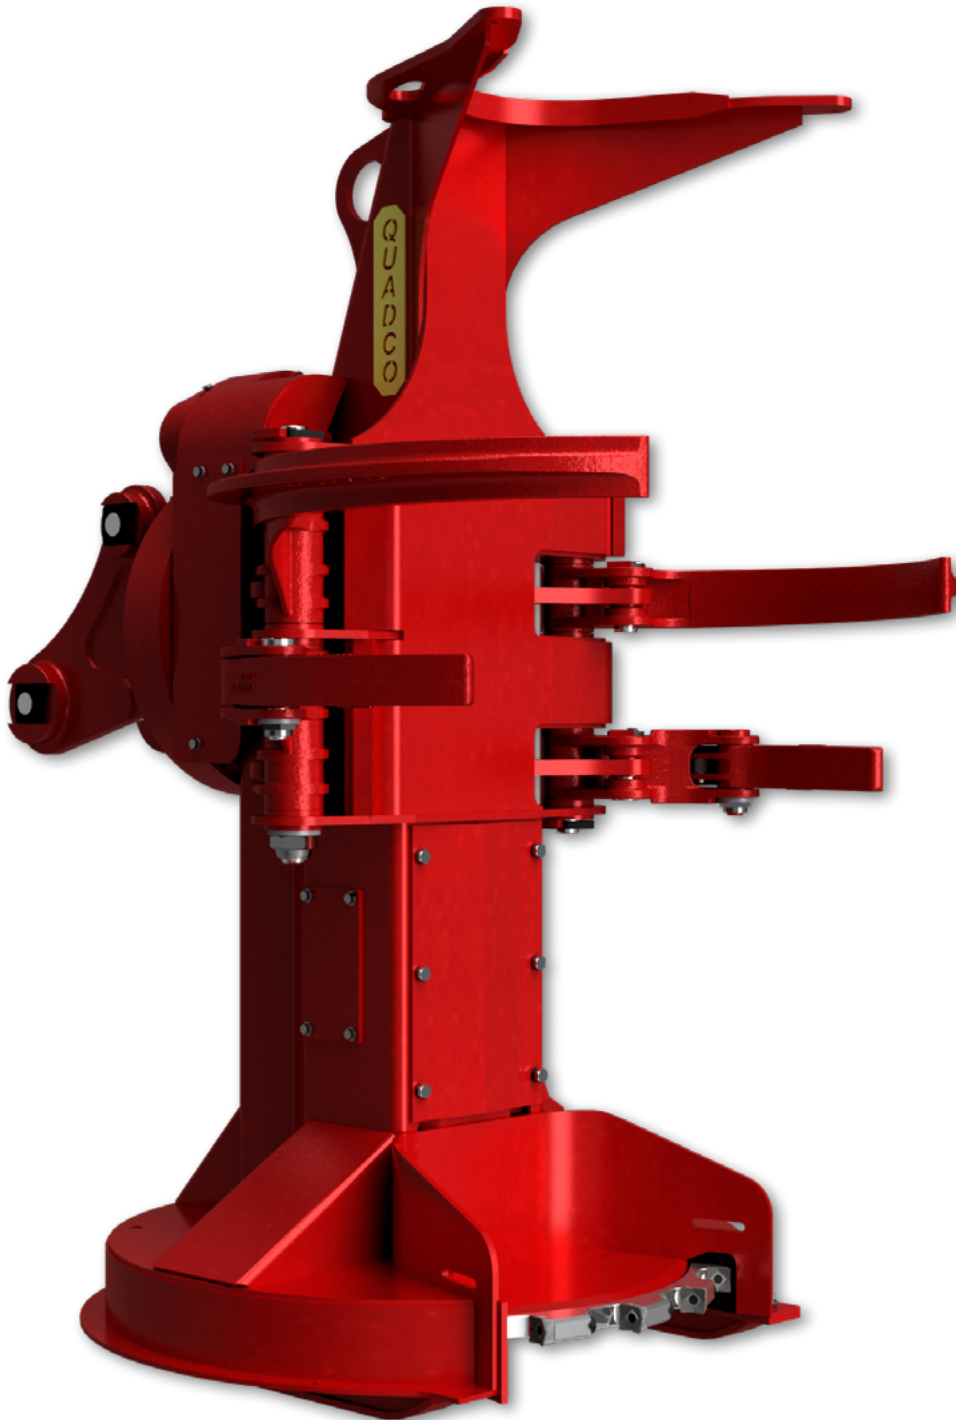

# 18C

## STANDARD CONFIGURATION

## METRIC

## IMPERIAL

WEIGHTS & DIMS.	Rotation 40° ( <i>Medium Torque</i> )	2,141 kg	4,720 lbs
	Rotation 360° ( <i>Medium Torque</i> )	2,263 kg	5,175 lbs
	Height	2,642 mm	104"
	Width	1,499 mm	59"
	Depth	1,295 mm	51"
	Maximum Throat Opening	762 mm	30"
	Maximum Throat Opening @ Teeth	737 mm	29"
	Accumulation Area ( <i>Over Blade</i> )	0.28 m <sup>2</sup>	3.0 ft <sup>2</sup>
DISC	Cutting Capacity	457 mm	18"
	Tip-to-Tip Diameter	1,219 mm	48"
	Rated Saw Speed	1,350 rpm	
	Number of Teeth	18	
	Saw Kerf	51 mm	2"
	Weight ( <i>Holders &amp; Teeth   Varies Depending on Disc</i> )	227 – 240 kg	500 – 530 lbs
	Style ( <i>One Piece or Segmented</i> )	Both	
HYD.	Grab Arms	1 Cylinder	
	Accumulating Arms	1 Cylinder	