




## 2400

Intermittent models are capable of shoveling wood, cutting individual large limbs, and topping large trees. They have an optional locking arms safety feature available for projects involving electrical wires. These heads are ideal for blow-down and right of way clearing due to their hold and cut tree control.

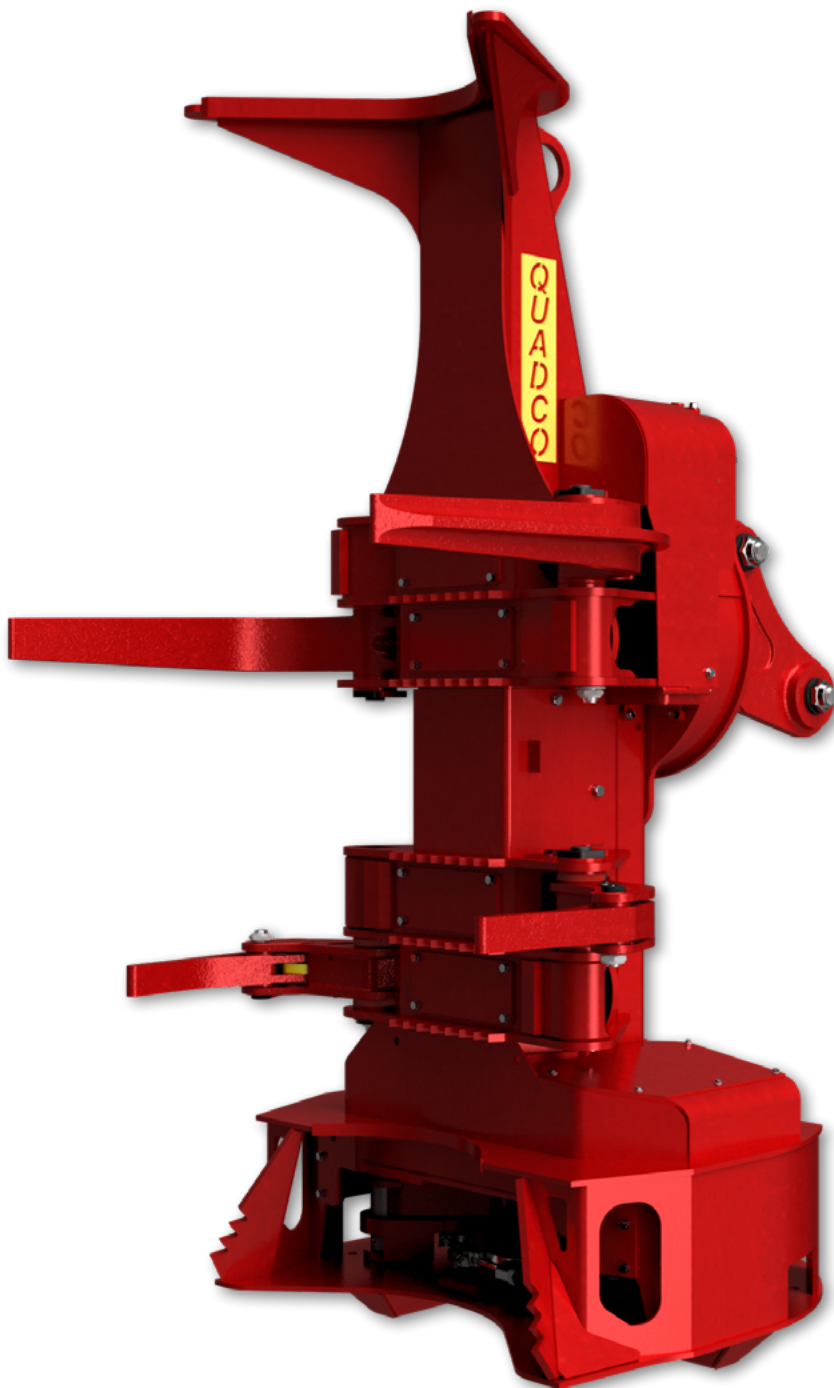

# 2400

## STANDARD CONFIGURATION

## METRIC

## IMPERIAL

WEIGHTS & DIMS.	Rotation 40° ( <i>High Torque</i> )	2,812 kg	6,200 lbs
	Rotation 360° ( <i>High Torque</i> )	2,994 kg	6,600 lbs
	Height	2,997 mm	118"
	Width	1,346 mm	53"
	Depth	1,524 mm	60"
DISC	Cutting Capacity	610 mm	24"
	Rated Saw Speed	760 rpm	
	Number of Teeth	12	
	Saw Kerf	41 mm	1 5/8"
SAW DRIVE	Motors	Two F12-30	
	Pinion		
	Rated Saw Speed		117 fps
CARRIER REQS.	Carrier Size		22 ton & plus
	PSI Working Pressure	248 – 276 bars	3,600 – 4,000 psi
	Valve Section Saw Circuit	284 lpm	75 gpm
	Low Flow Valves for Arms & Rotator	Yes	