





B-Models enable better leverage of big and tall timber with extended tower and "arms down" design. They feature durable cast grab and accumulator arms, each operated independently, and an ultra-reliable disc drive with easily adjustable bearings.

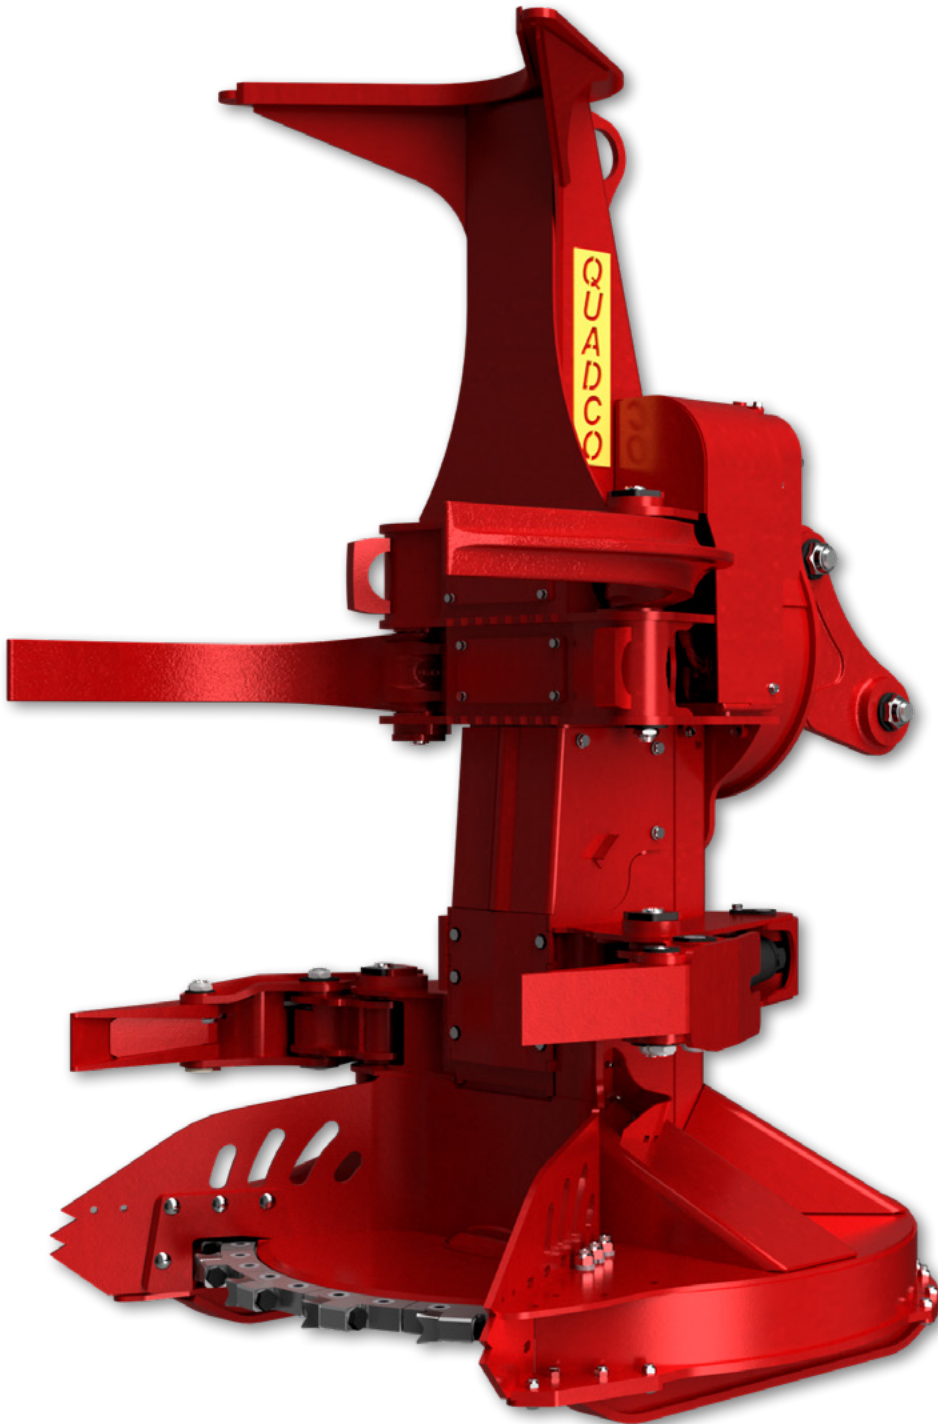

## STANDARD CONFIGURATION

## METRIC

## IMPERIAL

WEIGHTS & DIMS.	Height	2,972 mm	117"
	Width	1,778 mm	70"
	Depth	1,880 mm	74"
	Maximum Throat Opening	1,466 mm	57.7"
	Maximum Throat Opening @ Teeth	1,118 mm	44"
	Accumulation Area	0.58 m <sup>2</sup>	6.2 ft <sup>2</sup>
	Weight with XT Rotate	4,100 kg	9,040 lbs

DISC	Cutting Capacity	686 mm	27"
	Tip-to-Tip Diameter	1,651 mm	65"
	Rated Saw Speed	1,000 rpm	
	Number of Teeth	18	
	Saw Kerf	59 mm	2 5/16"
	Weight ( <i>Holders &amp; Teeth   Varies Depending on Disc</i> )	479 kg	1,056 lbs
	Style ( <i>One Piece or Segmented</i> )	Both	

HYD.	Cylinders ( <i>Diameter</i> )		3"   3.5"
	Grab Arms	2 Cylinders	
	Accumulating Arms	2 Cylinders	