
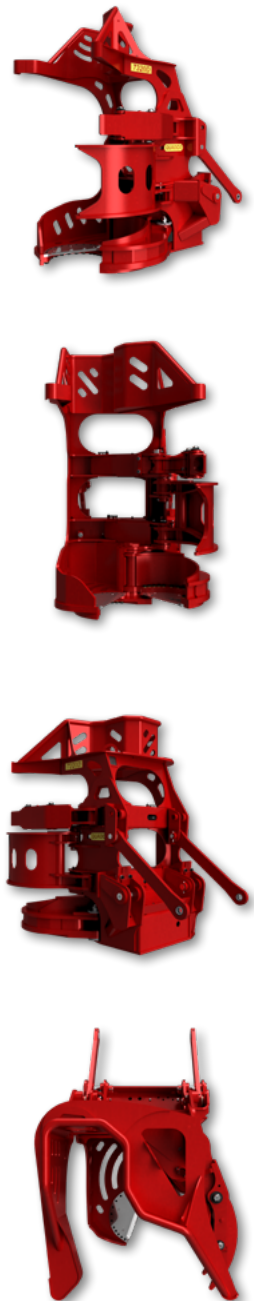


7320-HT

The Quadco 7320 High Capacity Shear Head will optimize your operation with an innovative design that boasts features like patent-pending multi-junction accumulating arms and customizable knife thickness. A compact build makes for better maneuverability while a centered bundle load greatly reduces twisting stress. With 20" soft wood cuts and 16" hard wood cuts, this redesigned model is made for smooth operating.

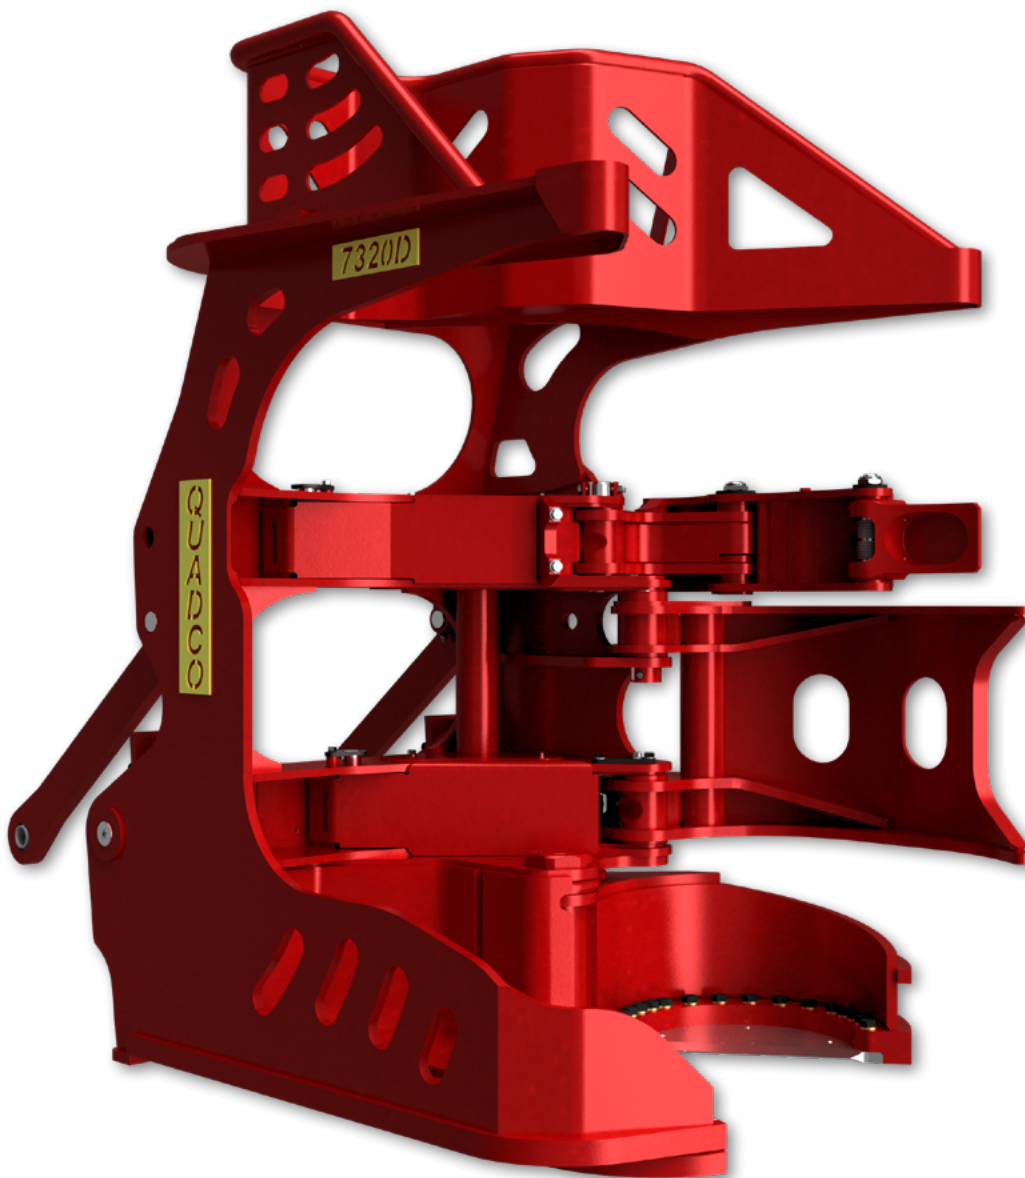

7320-HT

STANDARD CONFIGURATION

METRIC

IMPERIAL

| | | | |
|---------------------|--------------------------------------|---------------------|---------------------|
| WEIGHTS & DIMS. | Height | 2,489 mm | 98" |
| | Depth (<i>Closed, Main Frame</i>) | 1,308 mm | 51.5" |
| | Depth (<i>Open, Outside Guard</i>) | 1,499 mm | 59" |
| | Boom Mount Model | 1,803 mm | 71" |
| | Accumulation Area | 0.68 m ² | 7.3 ft ² |
| | Shear Knives Thickness | 25 mm | 1" |
| | Shear / Sweep Arm Closing Time | 76 mm | 3" |
| HYD. | Hydraulic Flow | 303 lpm | 80 gpm |
| | Arm Cylinders | 303 lpm | 80 gpm |
| | Rotor 360 degree | 57 – 67 lpm | 15 – 20 gpm |
| | Hydraulic Pressure Recommended | 252 bar | 3,650 psi |
| CUTTING CAPACITY | Optional 40-deg | 3,628.74 kg | 8,000 lbs |
| | Optional 360-deg | 3,633 kg | 8,009 lbs |
| | Drive-to-Tree (DT) | 227 kg | 500 lbs |