


The QB4400 Fixed Felling Head is a multi-functional felling attachment designed to fell, bunch, shovel, and load. Its high torque continuous rotation system and grapple type arm fundamentals allow for highly controlled felling for large, high-value hard and soft wood, providing increased value recovery.

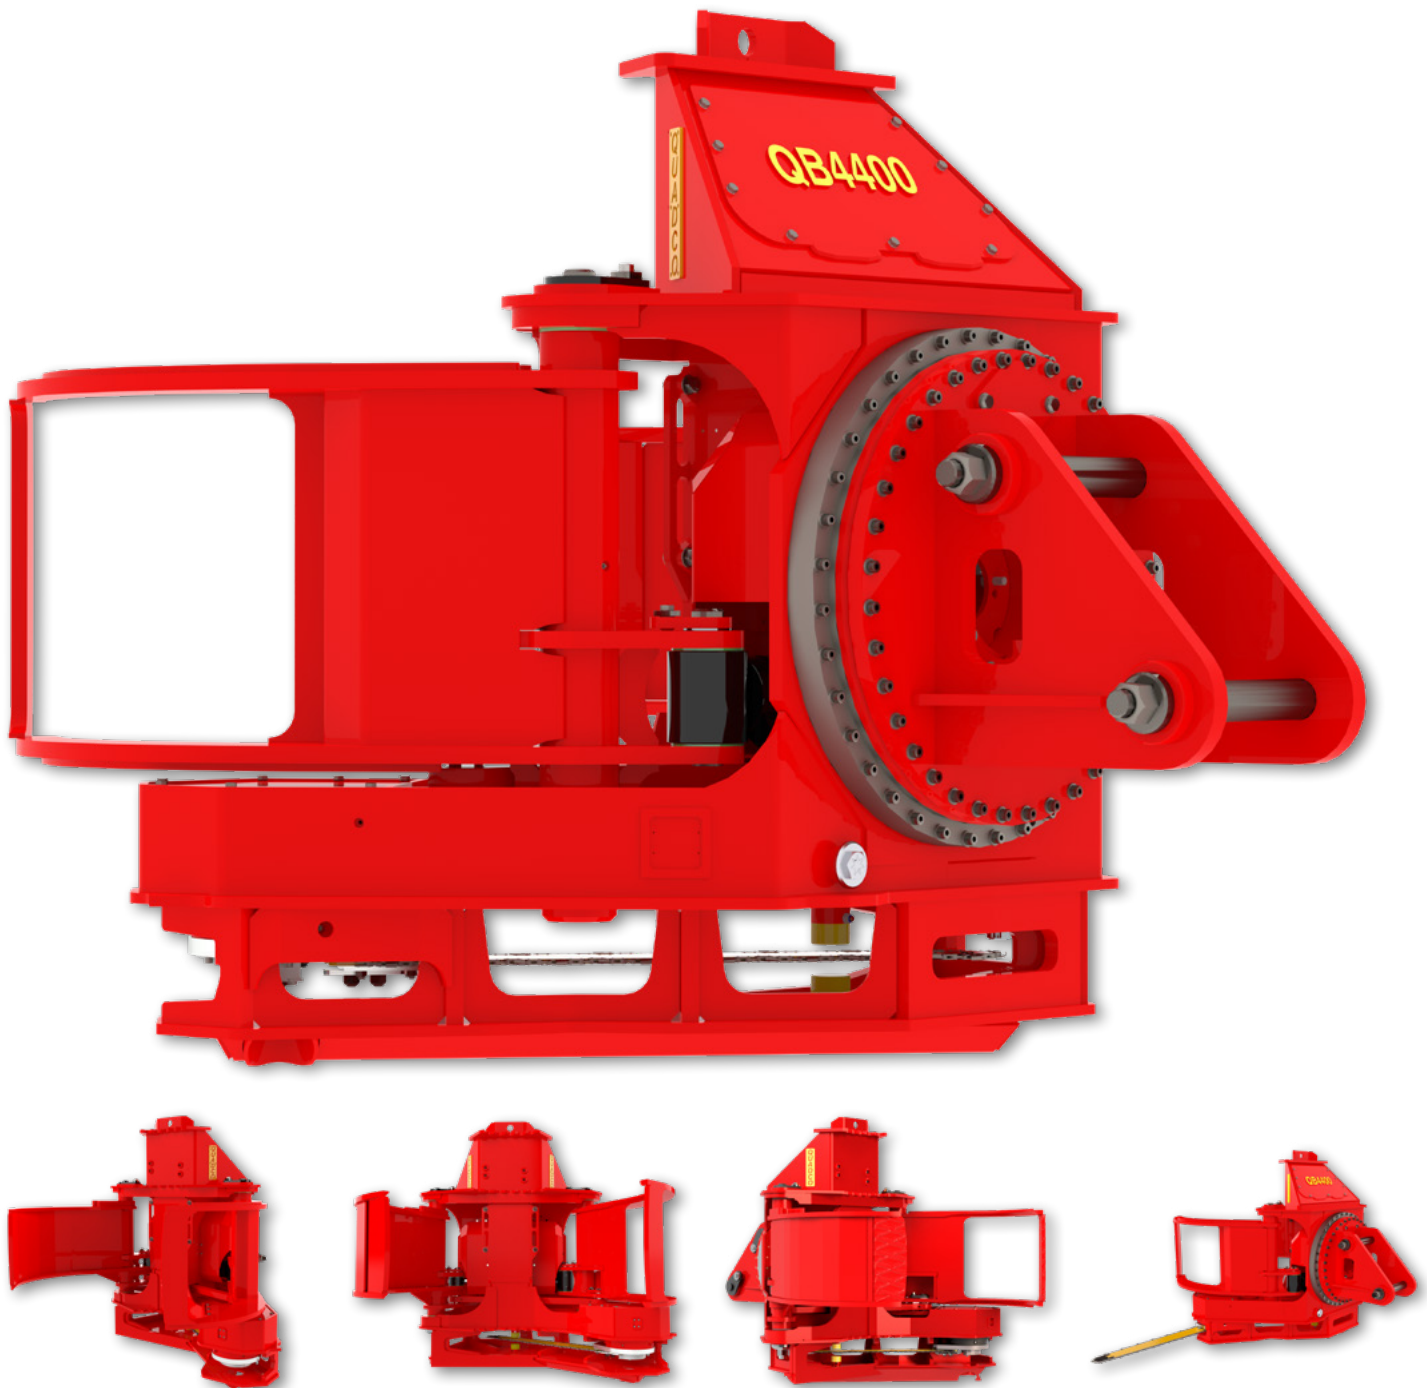

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.	Weight (incl. rotate and typical boom adapter)	3,300 kg	6,820 lbs
	Height	2,692 mm	106"
	Depth	2,478 mm	97"
	Width (<i>Arms Closed</i>)	2,045 mm	80"
	Width (<i>Arms Open</i>)	2,191 mm	86"
	Rotate Motors	3 x MCR05	
	Degree of Rotation	Continuous 360°	
GRAPPLE SECTION	Minimum Closing Diameter	170 mm	6.6"
	Maximum Opening	1,400 mm	55"
SAW	Cutting capacity /w 55" bar (140 cm)	1,222 mm	48"
	Cutting capacity /w 50" bar (127cm)	1,022 mm	40"
	Saw Motor	F12-60	
	Motor Size	60 cc	3.66 in ³
	Chain Size	19 mm	3/4"
	Saw Bar Rotation	225°	
HYD.	Pressure	300 bar	4,350 psi
	Maximum Flow	250 l/min	66 gpm
	Valve Bank	M4-15	
CARRIER REQS.	Carrier Size	30 – 35 ton	