


2000T

Log Max 2000T is a compact head that offers excellent performance and reliability. Developed for compact harvesters, the 2000T is the newest addition to the Log Max thinning heads series, T-Series.

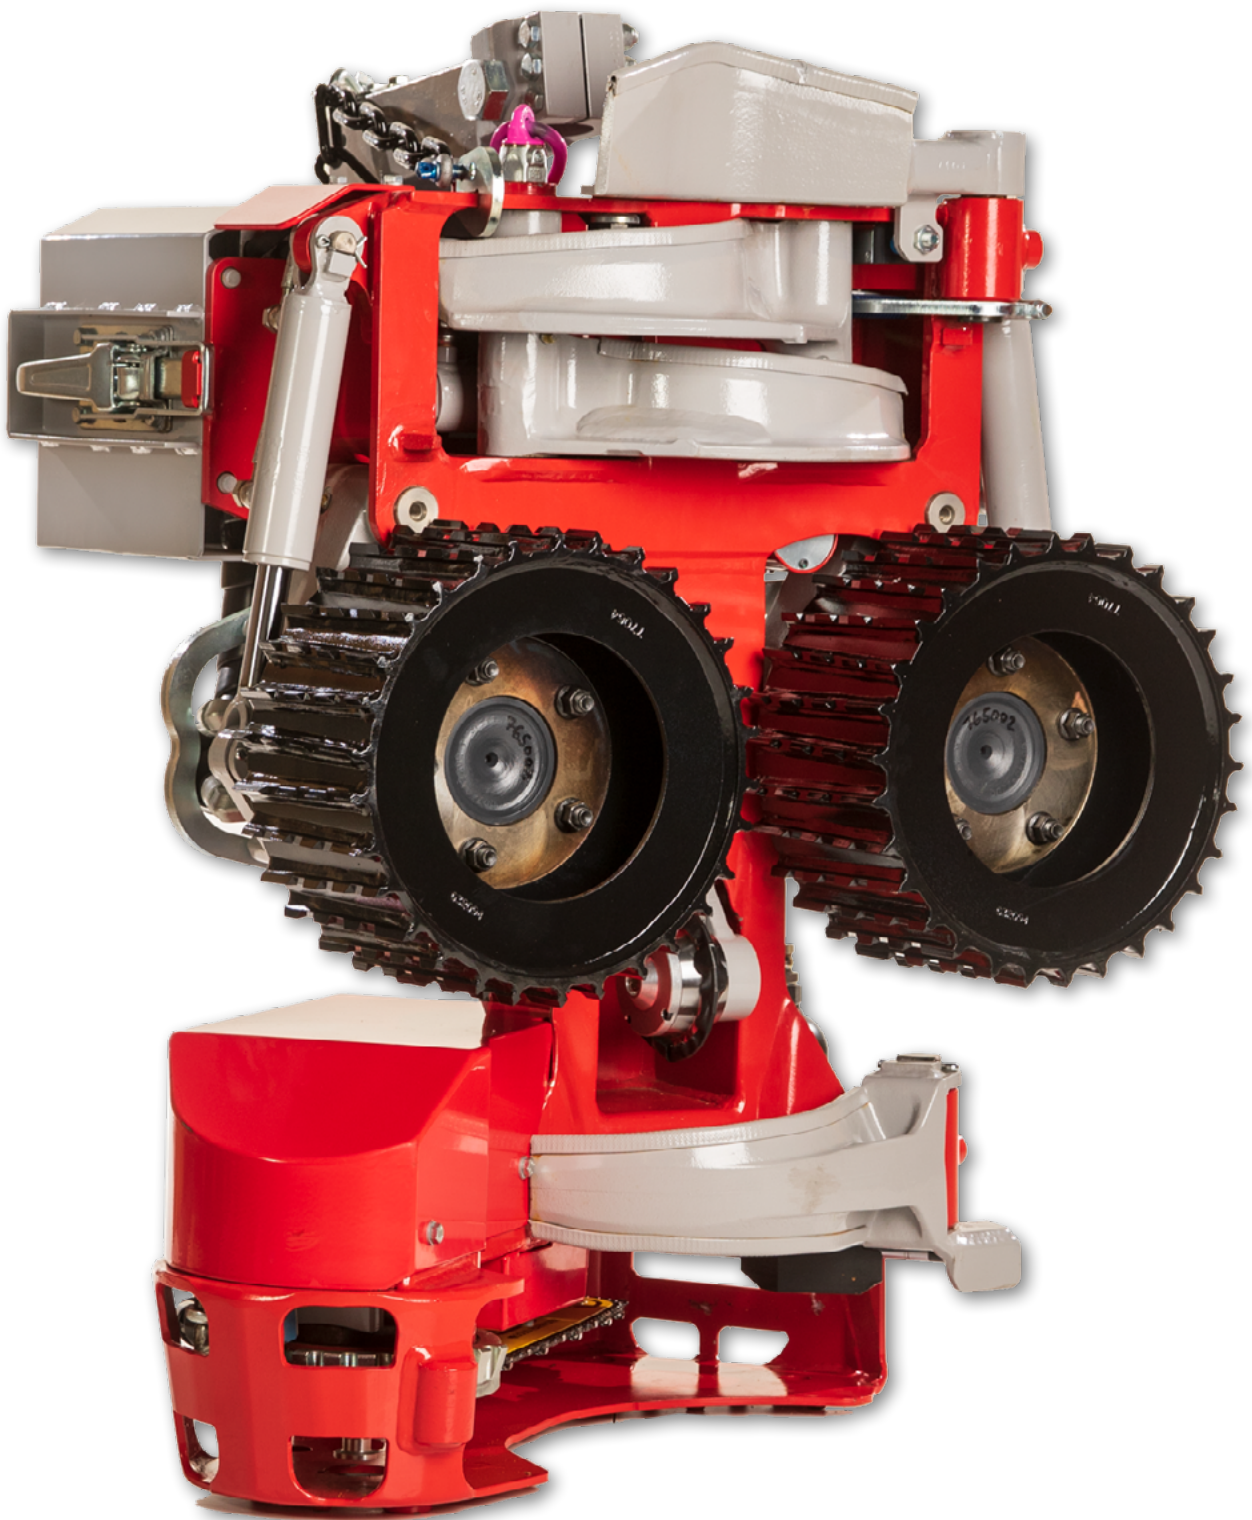

2000T

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.	Weight	420 kg	925.94 lbs
	Height	1080 mm	3.54 ft
	Width (With Roller Arms Open)	1005 mm	3.30 ft
	Width (With Roller Arms Closed)	818 mm	2.68 ft
FELLING & CUTTING	Optional Saw Models	Easy Cut	
	Optional Saw Tensioner	Manual	
	Top Saw Models		
	Top Saw Tensioner		
	Saw Oil Capacity	4.5 liters	1.19 gal
	Max Saw Bar Length	480 mm	18.90 in
	Max Cut Capacity	410 mm	16.14 in
DELIMBING	Number of Delimbing Knives	4	4
	Max Delimbing Knife Opening	358 mm	14.09 in
	Max Delimbing Full Coverage	268 mm	10.55 in
FEEDING	Feed Roller Models	V-STEEL SOFT GRIP, V-STEEL HARD GRIP	
	Feed Roller Motors	364 cc, 280 cc	364 cc, 280 cc
	Max Feed Force	14.8 kN	14.8 kN
	Max Feed Speed	4.0 m/s	13.12 ft/s
	Max Feed Roller Opening	329 mm	12.95 in
	Min Feed Roller Opening	11 mm	0.43 in
HYDRAULICS	Max Pressure	280 bar	4061.06 Psi
	Min Pressure	255 bar	3698.46 Psi
	Max Flow	140 l/min	36.98 gal/min
	Min Flow	90 l/min	23.78 gal/min
ROTATORS	Rotators	Indexator GV4, Indexator AV4EI	
BASE MACHINE	Excavator Max Weight	12 ton	26455.44 lbs
	Excavator Min Weight	7 ton	15432.34 lbs
	Wheeled Harvester Max Weight	12 ton	26455.44 lbs
	Wheeled Harvester Min Weight	5.5 ton	12125.41 lbs
	Tractor	6.5 ton	14330.03 lbs
	Crane Requirements Max	60 kNm	44253.72 lb/ft
	Crane Requirements Min	40 kNm	29502.48 lb/ft