


5000V

Log Max 5000V is a versatile Harvesting Head, and is suitable for a wide selection of carriers and for many types of felling. This is a head for those who want the ultimate balance between flexibility, capacity and durability.

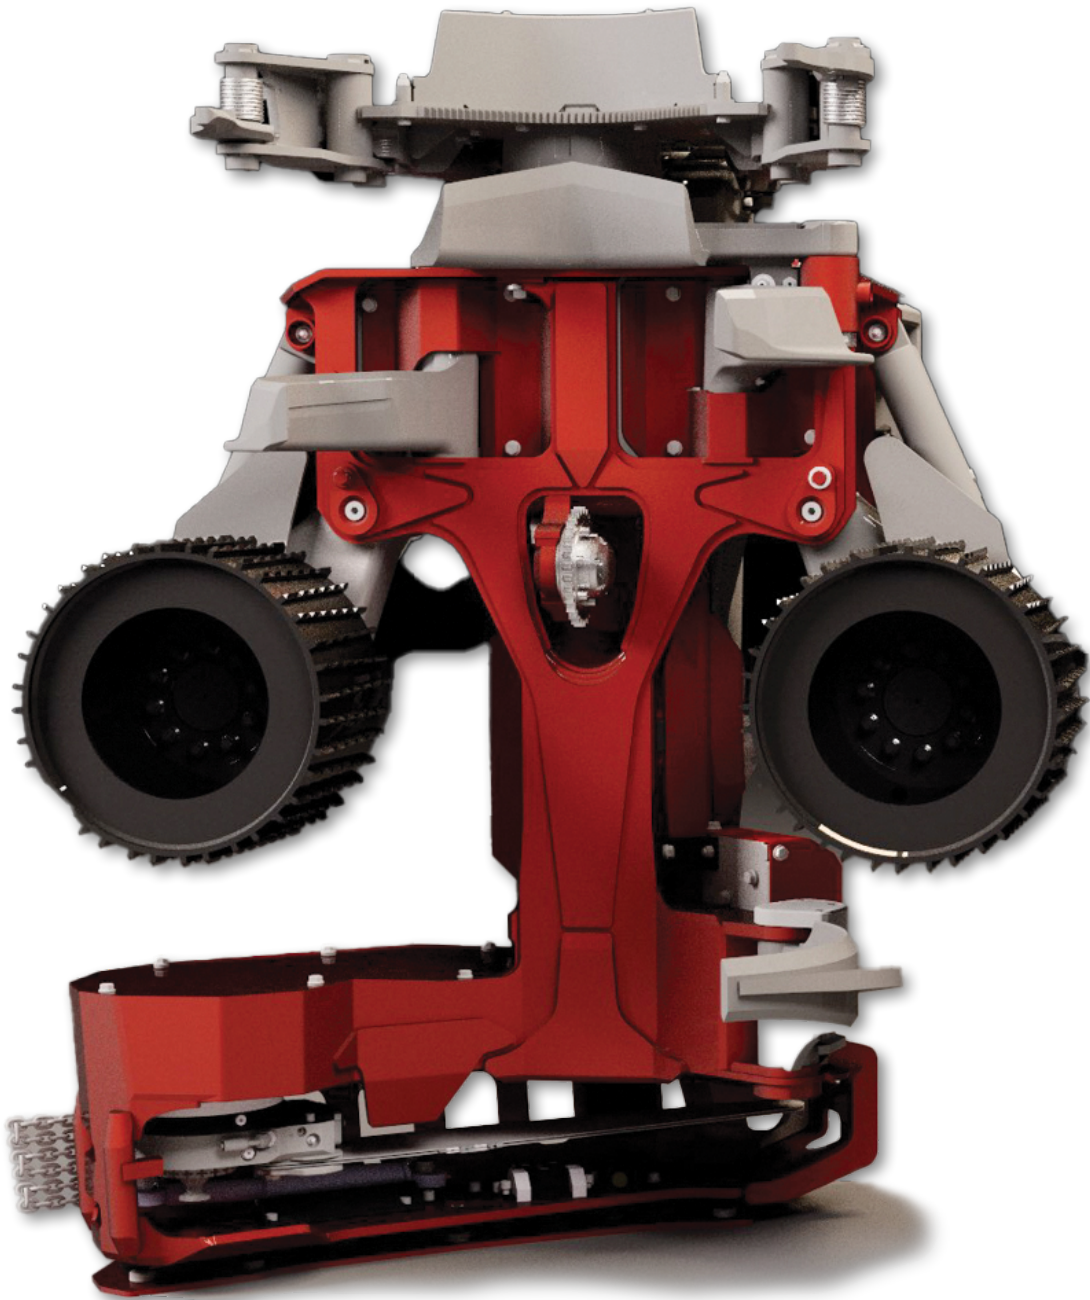

5000V

STANDARD CONFIGURATION

METRIC

IMPERIAL

| WEIGHTS & DIMS. | Weight | 950 kg | 2,094 lb |
|--------------------|-----------------------------|-------------------------------------|--------------|
| | Height | 1,541 mm | 60.6" |
| | Width Roller Arms Open | 1,382 mm | 54.4" |
| | Width Roller Arms Closed | 1,105 mm | 43.5" |
| DRIVE SECTION | Optional Saw Models | True-Cut 318 - 19cc, Saw 318 - 30cc | |
| | Optional Saw Tensioner | Automatic | |
| | Saw Oil Capacity | 20 liters | 5.3 gal |
| | Max Saw Bar Length | 820 mm | 32.3" |
| | Max Cut Capacity | 740 mm | 29.1" |
| DELIMB SECTION | Number of Delimbing Knives | 4 | |
| | Max Delimbing Knife Opening | 535 mm | 21.0" |
| | Max Delimbing Full Coverage | 398 mm | 15.6" |
| FEEDING | Max Feed Force | 26.2 kN | 5,889.76 lbf |
| | Max Feed Speed | 5 m/s | 11.18 mph |
| | Max Feed Roller Opening | 530 mm | 20.8 in" |
| | Min Feed Roller Opening | 12 mm | 0.47 in" |
| HYDRAULICS | Max Pressure | 280 bar | 4,061 psi |
| | Min Pressure | 250 bar | 3,625.94 psi |
| | Max Flow | 330 l/min | 87.17 gpm |
| | Min Flow | 200 l/min | 52.83 gpm |

* Standard and extra equipment are market-dependent and vary between countries. The specification describes possible equipment, not that which is standard or optional. Stated weights are based on standard equipment. Specifications and designs are subject to change without notice.