


M52 'PRELIMINARY'

Quadco's new 52-inch drum mulcher is part of new series of tough, reliable and productive forestry mulching attachments. It is an extreme duty attachment, best suited to 20-35 ton excavators and feller bunchers. To improve productivity and handling of ground material, a 102-degree lateral tilt is offered as standard equipment as well as a fixed heel equipped with replaceable bucket teeth. The drum has a spiral-shaped bite limiter that also spreads material evenly across the width. It is available with a variety of Quadco teeth, all-steel or carbide, to suit any application. Built-in universal boom adapter provides equipment dealers, particularly rental fleets, flexibility, and quick turn arounds to meet the demands of their client's businesses - pins and sleeves only can be swapped when a change of carriers is required.



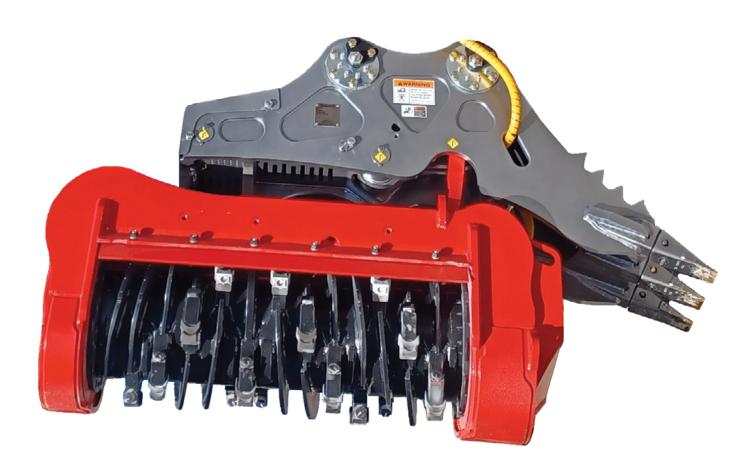

M52 'PRELIMINARY'

SPECIFICATIONS	METRIC	IMPERIAL
SPECIFICATIONS	IVILINIC	IIVIELDIAL

WEIGHT & DIMENSIONS

Weight (Incl lateral tilt, heel, typical bolt-on sleeves & pins)	2,223 kg	4,900 lbs
Overall Height	1,524 mm	60"
Width	864 mm	34"
Length (max. length with heel)	2,515 mm	99"
Lateral Tilt Angle	102° (+ 52°/-50°)	

DRUM	Cutting Swath	1,321 mm	52"
	Drum Diameter, Tip-to-Tip	610 mm	24"
	Number of Teeth	26	
	Drum Speed	2,200 rpm	

Recommended Carrier Size

Variable Displacement Motor

Minimum Flow @ Pressure

Optimum Flow @ Pressure

Maximum Pressure

Maximum Pressure

20 - 35 ton

1 x 170 cc

189 l/min @ 240 bar

50 gpm @ 3,500 psi

246 l/min @ 240 bar

5,000 psi





ı