


With incredible drive power and precision delimbing, the Log Max 10000XT is a highly productive Harvesting Head. Whether you're working at a landing, or felling and processing at the stump.

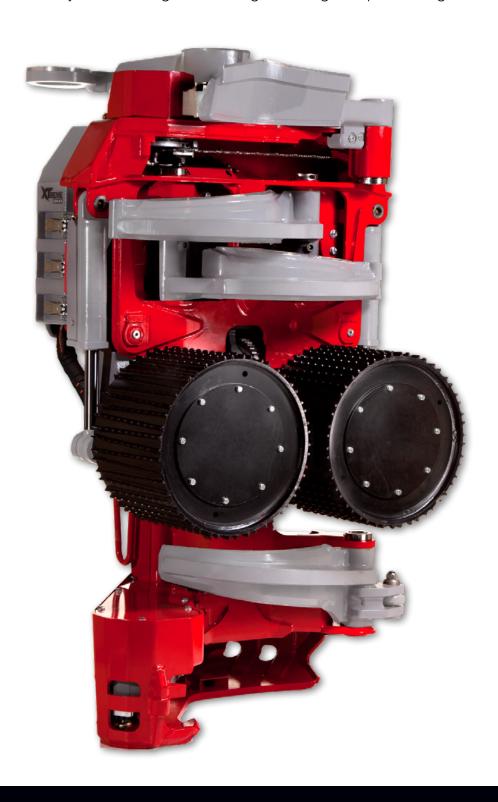

STANDARD CONFIGURATION		METRIC	IMPERIAL
WEIGHTS & DIMS.	Weight (Including Rotator Top & Link) Height (Without Rotator & Link) Maximum Width (With Head Open) Maximum Width (With Head Closed)	2,878 kg 233.9 cm 207.3 cm 138.6 cm	6,344 lbs 92" 81.6" 54.6"
	Degree of Rotation	Optional Continuous 360°	
DRIVE	Number of Drive Rollers Motor Size (<i>Drive Arm</i>) Maximum Drive Roller Opening (<i>Diameter</i>) Maximum Drive Roller Closing (<i>Diameter</i>) Feed Speed	1,404 cc 813 mm 55 mm 4.1 mps	2 85.68 in ³ 32" 2.1" 13.45 fps
DELIMB	Number of Delimb Arms Maximum Delimb Opening Maximum Delimb Full Coverage Minimum Delimb Closing (Diameter)	890 mm 58.0 cm 55 mm	3 35" 22.8" 2.2"
BUTT SAW	Saw Type Maximum Cut (Diameter) Bar Size Chain Pitch Motor Size Chain Auto Tension Oil Tank Capacity	72.5 cm 80 cm 82 cm 90 cm 0.404 mm 30 cc	18H 28.5" 31.5" 32.3" 35.5" 1.83 in ³ No 14.5 gal
TOP	Saw Type Maximum Cut (Diameter) Bar Size Chain Pitch Motor Size	98 53 cm 67 cm 0.404 mm 19 cc	20.9" 26.4" 1.16 in ³
CARRIER REGS.	Carrier Size (<i>Tracked</i>) Maximum Pressure	320 bar	25 – 35 ton 4,641 psi
CONTROL	Model Optional Additions Full Optimization Electronic Calipers (For Electronic Calibrations) Degree of Rotation	Log Mate 510 Yes Optional Optional Continuous 360°	