


27SC

Quadco's SC Models are designed with timber variety in mind. The 27SC's high accumulation capacity is perfect for eastern logs. The SC Models are made for efficient accumulation with the "Four Arms Up" design and extended tower for superior leverage when handling tall timber. Faster accumulation is easy with one cylinder per set of arms and a heavy-duty timing bar.

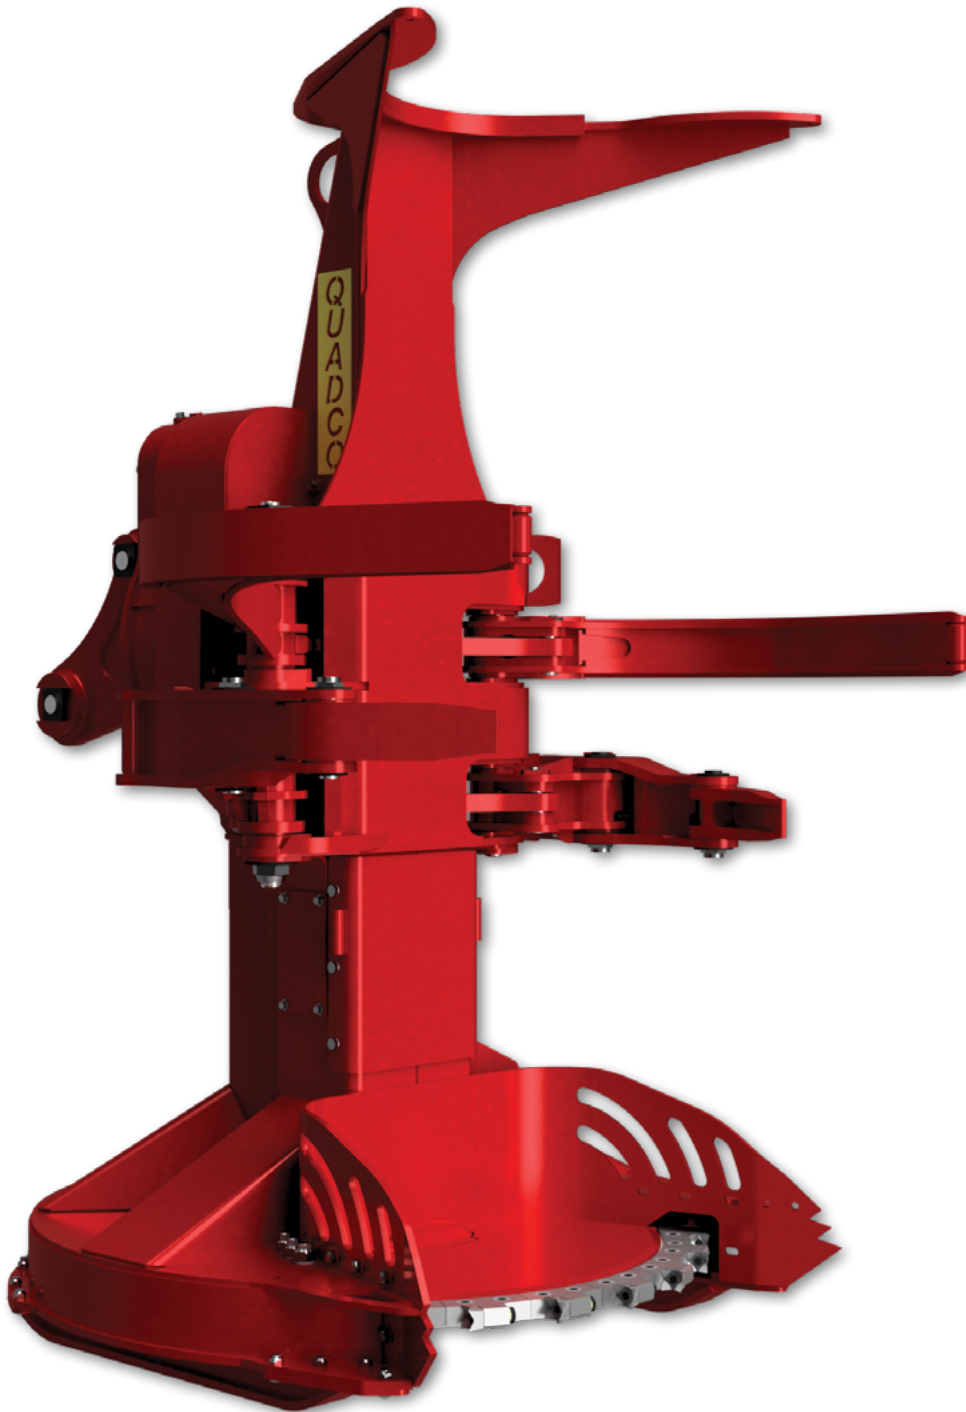

27SC

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.	Rotation 40° (<i>High Torque</i>)	3,493 kg	7,700 lbs
	Rotation 360°	3,674 kg	8,100 lbs
	Number of Motors (<i>360</i>)	2	
	Height	3,035 mm	119.5"
	Width	1,778 mm	70"
	Depth	1,867 mm	73.5"
	Maximum Throat Opening	1,442 mm	56.75"
	Maximum Throat Opening @ Teeth	1,143 mm	45"
	Accumulation Area (<i>Over Blade</i>)	2.1 m ²	7.0 ft ²
	Accumulation Area (<i>Over Tree Support Plate Only</i>)	1.5 m ²	5.0 ft ²
	Bunching Trees (<i>15 cm / 6"</i>)	24	
DISC	Cutting Capacity	686 mm	27"
	Tip-to-Tip Diameter	1,651 mm	65"
	Rated Saw Speed	1,000 rpm	
	Number of Teeth	18	
	Saw Kerf	61.91 mm	2 1/2"
	Weight (<i>Holders & Teeth / Varies Depending on Disc</i>)	499 kg	1,100 lbs
	Style (<i>One Piece or Segmented</i>)	Both	
HYD.	Cylinders (<i>Diameter</i>)	102 mm	4"
	Grab Arms	1 Cylinder	
	Accumulating Arms	1 Cylinder	
CARRIER REQS.	PSI Working Pressure		3,650 – 4,200 psi