




## **M52**

Quadco's new 52-inch drum mulcher is part of new series of tough, reliable and productive forestry mulching attachments. It is an extreme duty attachment, best suited to 20-35 ton excavators and feller bunchers. To improve productivity and handling of ground material, a 102-degree lateral tilt is offered as standard equipment as well as a fixed heel equipped with replaceable bucket teeth. The drum has a spiral-shaped bite limiter that also spreads material evenly across the width. It is available with a variety of Quadco teeth, all-steel or carbide, to suit any application. Built-in universal boom adapter provides equipment dealers, particularly rental fleets, flexibility, and quick turn arounds to meet the demands of their client's businesses - pins and sleeves only can be swapped when a change of carriers is required.



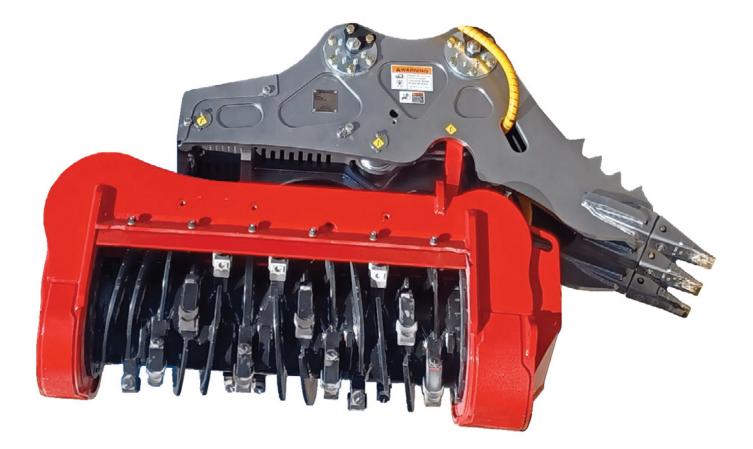

Maximum Pressure

## QUADCO

5,000 psi

## M52

SPECIFICATIONS		METRIC	IMPERIAL		
WEIGHT & DIMENSIONS	Weight (Incl lateral tilt, heel, typical bolt-on sleeves &	pins)	2,223 kg	4,900 lbs	
	Overall Height		1,524 mm	60"	
	Width		864 mm	34"	
	Length (max. length with heel)		2,515 mm	99"	
	Lateral Tilt Angle		102° (+ 52°/-50°)		
DRUM	Cutting Swath		1,321 mm	52"	
	Drum Diameter, Tip-to-Tip		610 mm	24"	
	Number of Teeth		26		
	Drum Speed		2,200 rpm		
HYDRAULICS	Recommended Carrier Size		20 - 35 ton		
	Variable Displacement Motor		1 x 170 cc		
	Minimum Flow @ Pressure	1	89 l/min @ 240 bar	50 gpm @ 3,500 psi	
ž	Optimum Flow @ Pressure	2	46 I/min @ 240 bar	65 gpm @ 3,500 psi	



340 bar

