


Quadco's 42-inch drum mulcher is the latest addition to a current line up of tough, reliable and productive forestry mulching attachments. It is an extreme duty attachment, best suited to 17-25 ton excavators and feller bunchers. It is available with a variety of Quadco teeth, all-steel or carbide, to suit any application. Built-in universal boom adapter provides equipment dealers, particularly rental fleets, flexibility and versatility, to meet the demands of their client's businesses - pins and sleeves can be swapped to fit different brands of carrier as required.

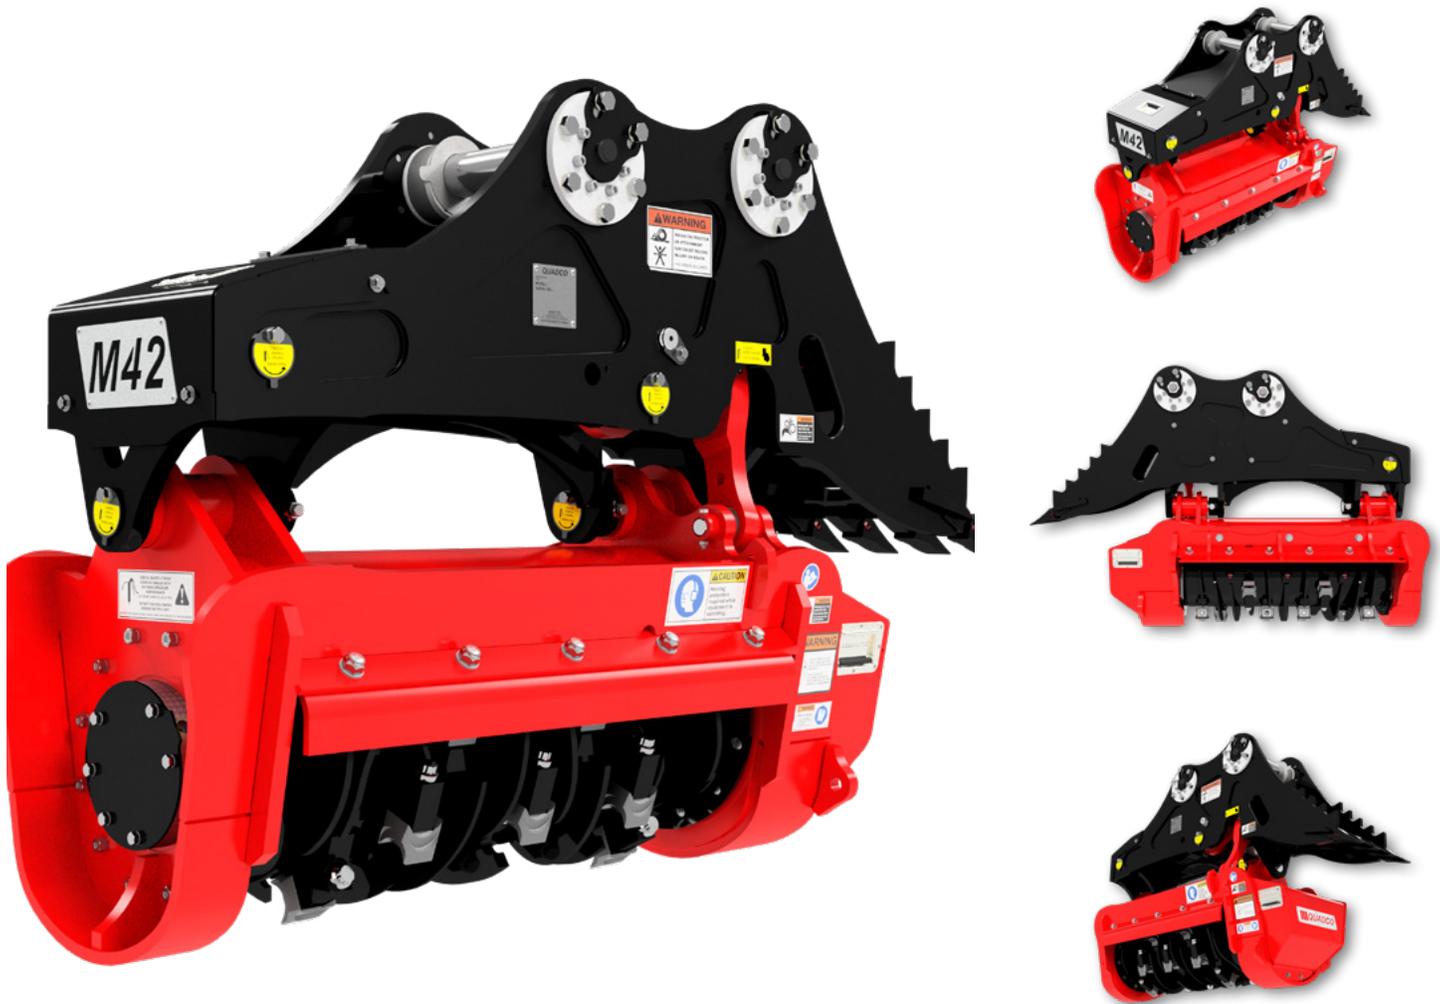

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHT & DIMENSIONS	Weight (<i>Incl lateral tilt, heel, typical bolt-on sleeves & pins</i>)	1,588 kg	3,500 lbs
	Overall Height	1,424 mm	56"
	Width	787 mm	31"
	Length (max. length with heel)	2,083 mm	82"
	Lateral Tilt Angle	110° (50°/60°)	

DRUM	Cutting Swath	106.7 cm	42"
	Drum Diameter, Tip-to-Tip	55 cm	21.6"
	Number of Teeth	Large kerf (22x) Carbide or Steel	
	Drum Speed	2,500 rpm	

HYDRAULICS	Recommended Carrier Size	17 - 25 ton	
	Variable Displacement Motor	Direct 170cc piston type / variable	
	Minimum Flow @ Pressure	40 gpm @ 3,500 psi	151 l/min @ 240 bar
	Optimum Flow @ Pressure	55 gpm @ 3,500 psi	208 l/min @ 240 bar
	Maximum Pressure	5,000 psi	340 bar

QMX10420X



Carbide - Rock
Extreme Impact
High Abrasion

QMX10395X



Carbide - Planer
Reduce material size
Medium Impact
High Abrasion


QMX10380T



Steel - Planer 4-in-1
Rotatable & Reversible
Sharpenable
Low Abrasion

QMX10384T


*Requires Spacer Q10632T



Steel - Beaver
Rotatable - Reversible
Viney material
Low Abrasion

QMX10385T

*Requires Spacer Q11201CT



Steel - Woodchuck
Rotatable - Reversible
Sharpenable
Low Abrasion